



SPECIFICATIONS	
INPUT VOLTAGE	12 VDC / 48 VDC
OUTPUT SPEED	1000 TO 8000 RPM
OUTPUT H.P.	UP TO .25 H.P. CONTINUOUS
LENGTH "L"	3.75 / 6.25
SHAFT DIA. "D"	UP TO ϕ .375
SHAFT EXT. "S"	AS REQUESTED
SHAFT FEATURES	HOB, FLAT, KEYWAY, OR AS REQUESTED
MOUNTING	FACE
BRUSHES	REPLACEABLE AND / OR NON-REPLACEABLE
POWER CONNECTION	AS REQUESTED
OUTPUT BEARING	BALL BEARING
VENTING	ENCLOSED / VENTED / FAN COOLED
INSULATION	UP TO CLASS H

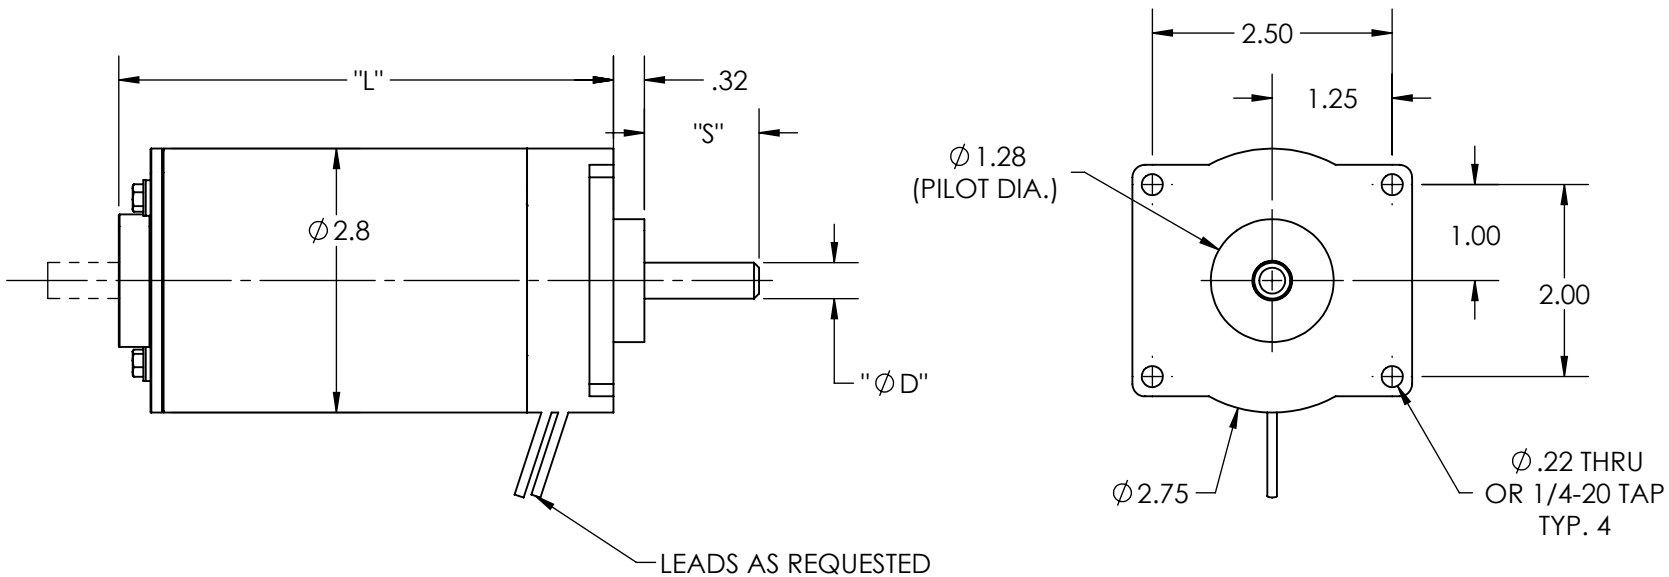

REV.		DESCRIPTION		DATE		ECN							
DESIGN APPROVAL		DATE		UNSPECIFIED TOLERANCES		PART NO. DM28 DUMORE CORPORATION 1030 VETERANS ST. MAUSTON, WI 53948							
DES. ENG.				.XXX ± .005 .XX ± .015 .X ± .050									
MFG. ENG.				MACHINE FINISH ± 1° ANGLES .005 TIR CONCENTRICITY .001 PER IN. SQUARENESS									
Q.C.													
SALES													
DO NOT SCALE DRAWING				REMOVE ALL BURRS BREAK SHARP CORNERS		TITLE 2.8" DIA. PMDC MOTOR							
MATERIAL SPEC.				Req. per Piece		RECEIVED AS		DWG. BY		DATE		SCALE	
				Pattern No.				CRD. BY		DATE			

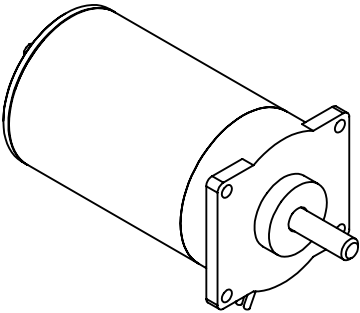

This Drawing is the property of the Dumore Corporation. It must not be reproduced or copied without written permission.