
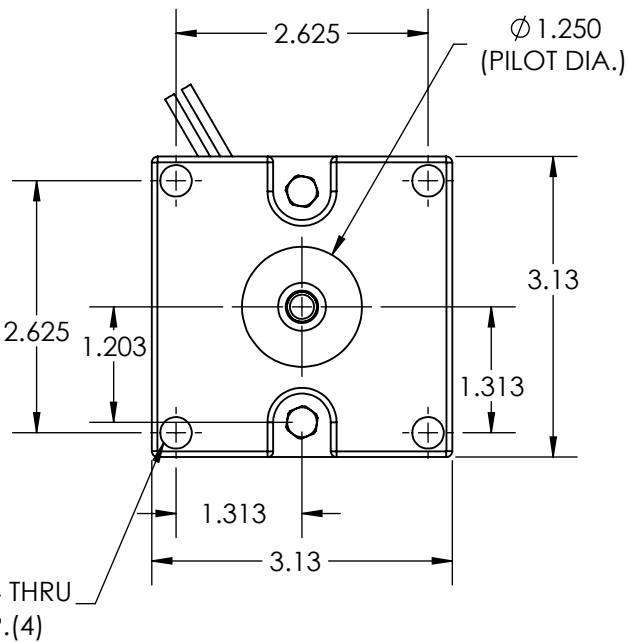
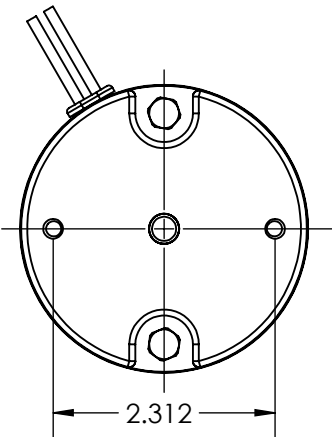
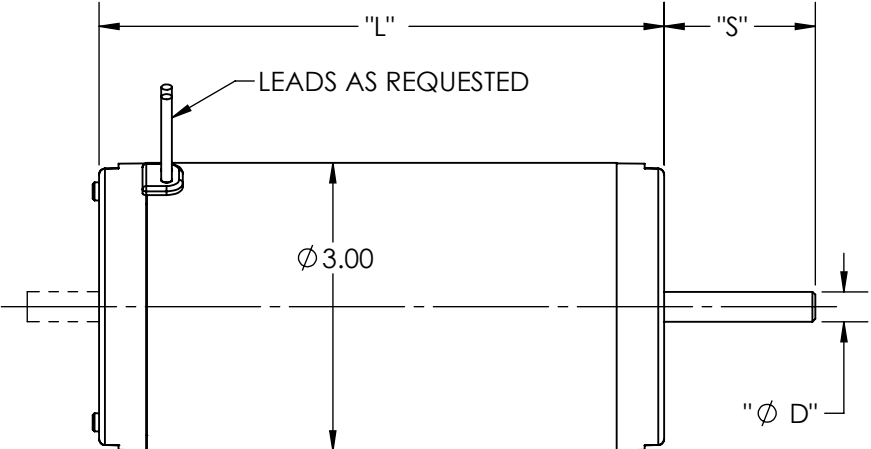



SPECIFICATIONS	
INPUT VOLTAGE	12 VDC - 240 VDC
OUTPUT SPEED	1000 TO 8000 RPM
OUTPUT H.P.	UP TO .4 H.P. CONTINUOUS
LENGTH "L"	3.82 / 6.60
SHAFT DIA. "D"	UP TO ϕ .500
SHAFT EXT. "S"	AS REQUESTED
SHAFT FEATURES	HOB, FLAT, KEYWAY, OR AS REQUESTED
MOUNTING	FACE MOUNT, AND / OR FOOT MOUNT
BRUSHES	INTERNAL BRUSH CARD
POWER CONNECTION	AS REQUESTED
OUTPUT BEARING	BALL BEARING
VENTING	ENCLOSED / VENTED / FAN COOLED
INSULATION	UL CLASS H



REV.		DESCRIPTION		DATE	ECN
DESIGN APPROVAL		UNSPECIFIED TOLERANCES		PART NO.	
DES. ENG.		.XXX	± .005	 DM30 DUMORE CORPORATION 1030 VETERANS ST. MAUSTON, WI 53948	
MFG. ENG.		.XX	± .015		
Q.C.		.X	± .050		
SALES		MACHINE FINISH	± 1°		
		ANGLES	.005 TIR	TITLE 3.0" PMDC MOTOR	
		CONCENTRICITY	.001 PER IN.		
		SQUARENESS			
DO NOT SCALE DRAWING		REMOVE ALL BURRS BREAK SHARP CORNERS			
MATERIAL SPEC.		Req. per Piece	RECEIVED AS	DWG. BY	DATE
		Pattern No.		CRD. BY	DATE
					SCALE
					1:2