
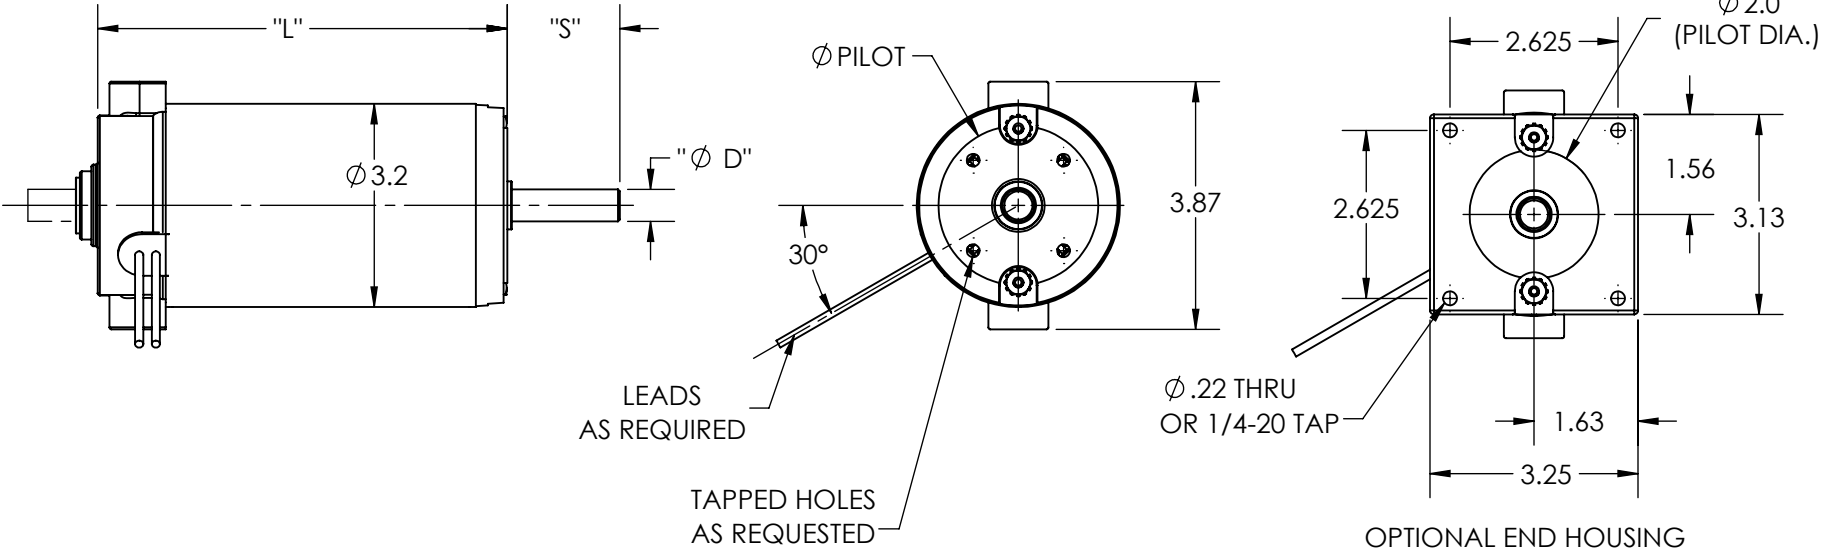


SPECIFICATIONS	
INPUT VOLTAGE	12 VDC / 240 VDC
OUTPUT SPEED	1000 TO 8000 RPM
OUTPUT H.P.	UP TO .5 H.P. CONTINUOUS
LENGTH "L"	4.0 / 8.0
SHAFT DIA. "Ø D"	UP TO Ø .500
SHAFT EXT. "S"	AS REQUESTED
SHAFT FEATURES	HOB, FLAT, KEYWAY, OR AS REQUESTED
MOUNTING	FACE OR FOOT MOUNTING
BRUSHES	INTERNAL BRUSH CARD, OR REPLACEABLE BRUSHES
POWER CONNECTION	AS REQUESTED
OUTPUT BEARING	BALL BEARING
VENTING	ENCLOSED / VENTED / FAN COOLED
INSULATION	UL CLASS H

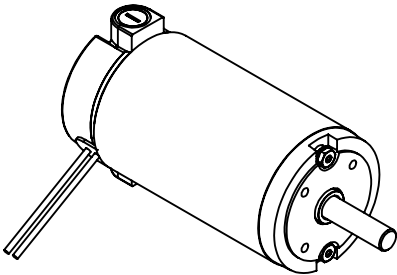

REV.		DESCRIPTION		DATE	ECN
DESIGN APPROVAL		UNSPECIFIED TOLERANCES		 PART NO. DM32 DUMORE CORPORATION 1030 VETERANS ST. MAUSTON, WI 53948	
DES. ENG.		.XXX	± .005		
MFG. ENG.		.XX	± .015		
		.X	± .050		
Q.C.		MACHINE FINISH	± 1°		
SALES		ANGLES	.005 TIR	This Drawing is the property of the Dumore Corporation. It must not be reproduced or copied without written permission.	
		CONCENTRICITY	.001 PER IN.		
		SQUARENESS			
DO NOT SCALE DRAWING		REMOVE ALL BURRS BREAK SHARP CORNERS		TITLE 3.2" MOTOR	
MATERIAL SPEC.		Req. per Piece	RECEIVED AS	DWG. BY	DATE
		Pattern No.		CRD. BY	DATE
					SCALE 1:2