



SPECIFICATIONS	
INPUT VOLTAGE	12 VDC - 240 VDC
OUTPUT SPEED	1 - 1200 RPM
OUTPUT TORQUE	UP TO 300 IN-LBS
GEAR RATIO	10:1 - 170:1
LENGTH "L1"	3.75 / 8.00
LENGTH "L2"	2.46 / 2.79
SHAFT DIA. "Ø D"	UP TO Ø .500
SHAFT EXT. "S"	AS REQUESTED
SHAFT FEATURE	HOB, FLAT, KEYWAY, OR AS REQUESTED
MOUNTING	FACE, FOOT, OR AS REQUIRED
BRUSHES	INTERNAL BRUSH CARD, OR REPLACEABLE BRUSHES
LEAD WIRES	AS REQUESTED
BEARINGS	NEEDLE ROLLER BEARING OR SLEEVES
VENTING	ENCLOSED / VENTED / FAN COOLED
INSULATION	UL CLASS H
MOTOR TYPE	SERIES DM28, OR DM32

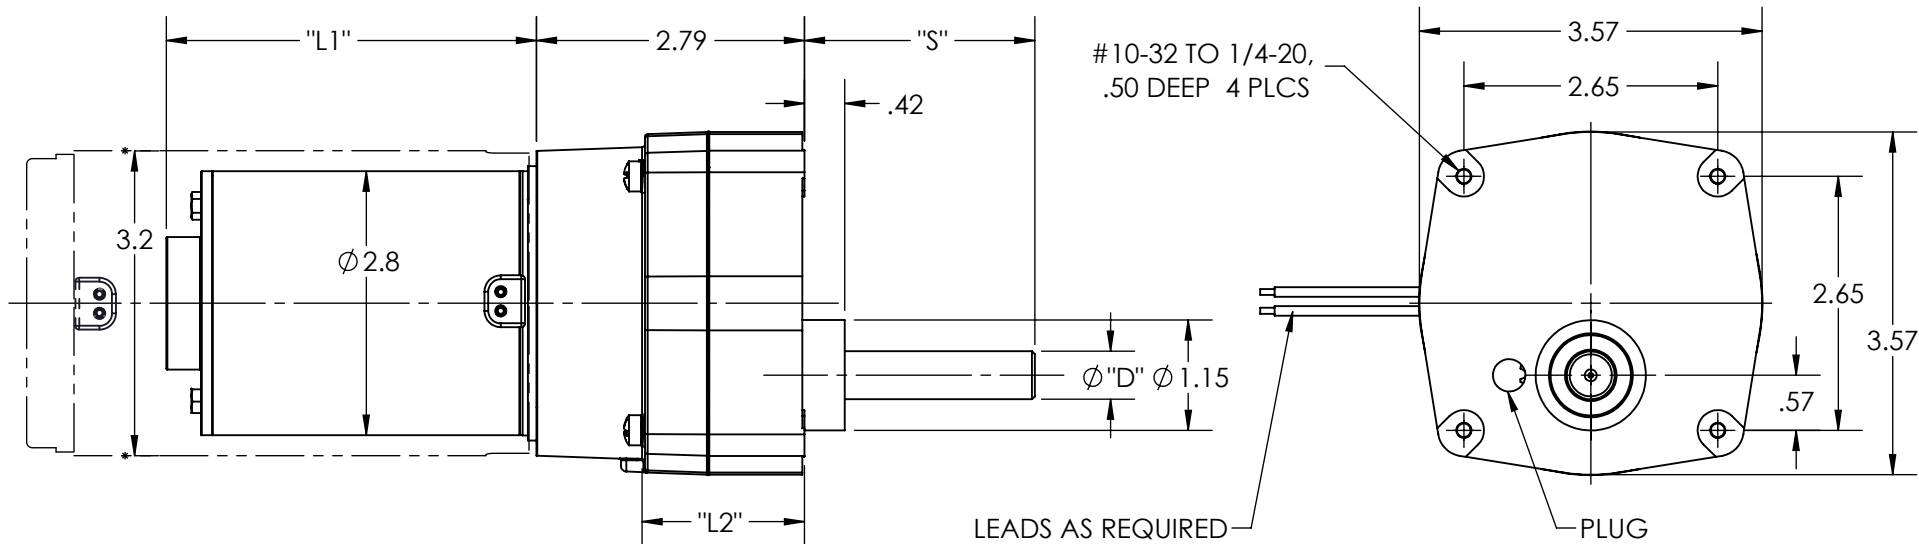

REV.	DESCRIPTION	DATE	ECN
DESIGN APPROVAL	UNSPECIFIED TOLERANCES		
DES. ENG.	.XXX ± .005		
MFG. ENG.	.XX ± .015		
Q.C.	.X ± .050		
SALES	MACHINE FINISH ± 1°		
	ANGLES .005 TIR		
	CONCENTRICITY .001 PER IN.		
	SQUARENESS		
DO NOT SCALE DRAWING		REMOVE ALL BURRS BREAK SHARP CORNERS	
MATERIAL SPEC.		TITLE	
		PARALLEL SHAFT GEARMOTOR	
		RECEIVED AS	SCALE
		DWG. BY	1:2
		CRD. BY	
		DATE	

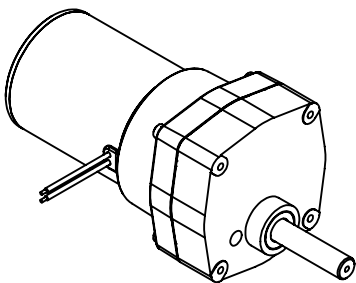

PART NO.

DP125

DUMORE CORPORATION

1030 VETERANS ST. MAUSTON, WI 53948

This Drawing is the property of the Dumore Corporation. It must not be reproduced or copied without written permission.