
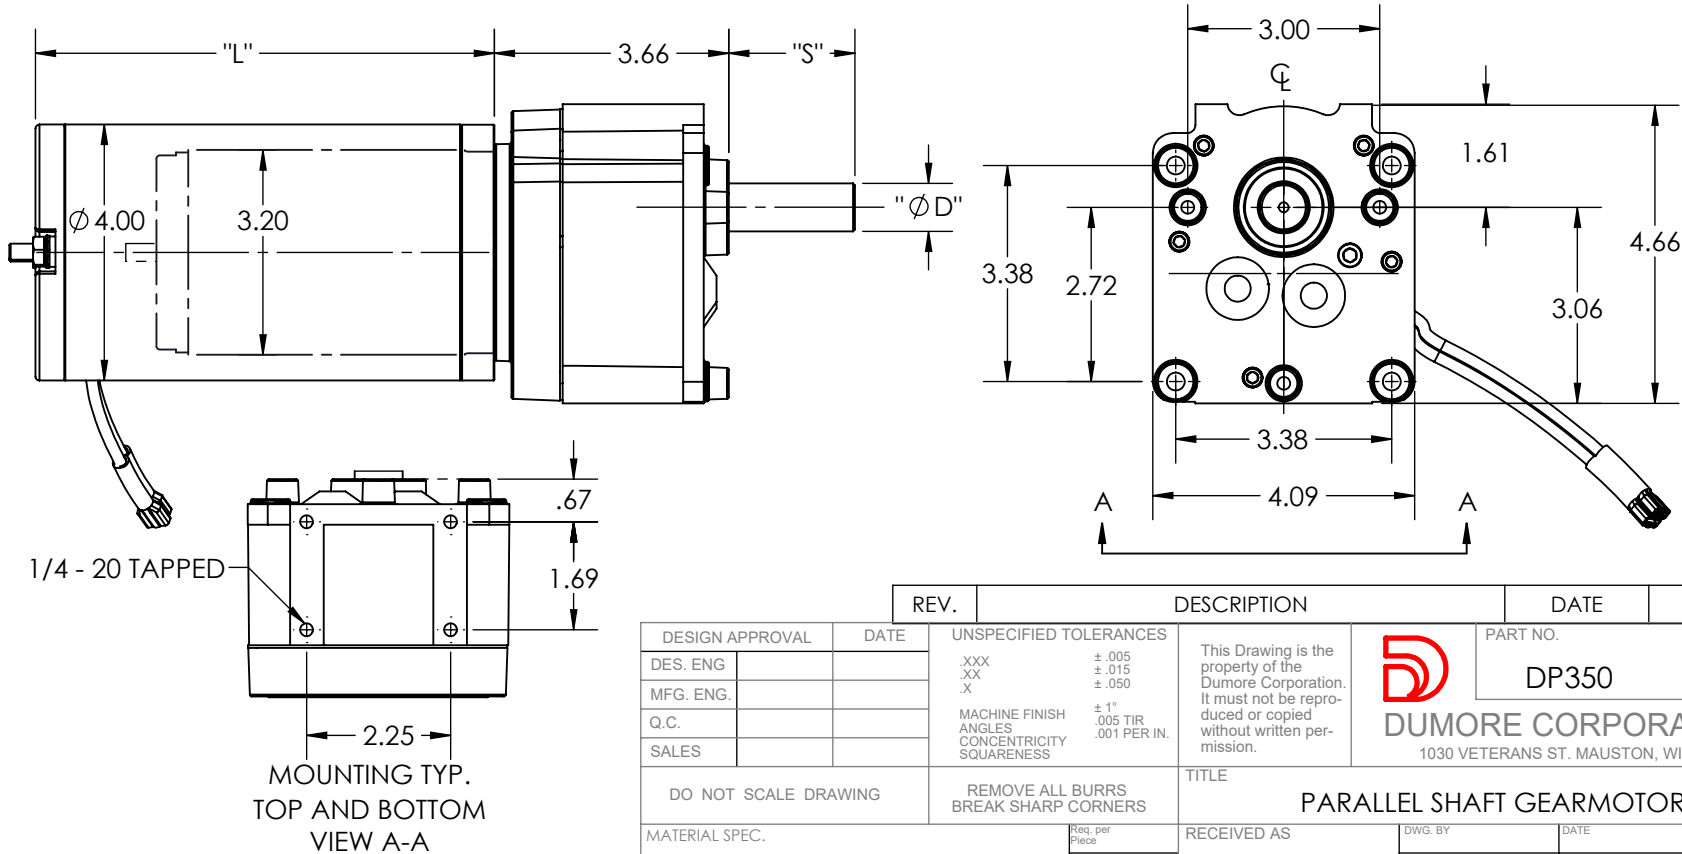


SPECIFICATIONS	
INPUT VOLTAGE	12 VDC - 240 VDC
OUTPUT SPEED	7 - 1200 RPM
OUTPUT TORQUE	UP TO 700 IN-LBS
GEAR RATIO	5:1 - 250:1
LENGTH "L"	4.00 / 8.75
SHAFT DIA. "Ø D"	UP TO Ø .750
SHAFT EXT. "S"	AS REQUESTED
SHAFT FEATURE	HOB, FLAT, KEYWAY, OR AS REQUESTED
MOUNTING	FACE, FOOT, OR AS REQUESTED
BRUSHES	INTERNAL BRUSH CARD, OR REPLACEABLE BRUSHES
LEAD WIRES	AS REQUIRED
BEARINGS	NEEDLE, ROLLER BARINGS OR SLEEVES
VENTING	ENCLOSED / VENTED / FAN COOLED
INSULATION	UL CLASS H
MOTOR TYPE	SERIES DM32 OR DM40

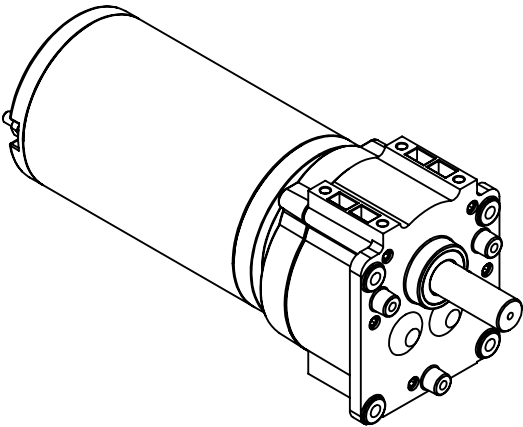

REV.		DESCRIPTION		DATE	ECN	
DESIGN APPROVAL		UNSPECIFIED TOLERANCES		 PART NO. DP350 DUMORE CORPORATION 1030 VETERANS ST. MAUSTON, WI 53948		
DES. ENG.		.XXX .XX .X	± .005 ± .015 ± .050			This Drawing is the property of the Dumore Corporation. It must not be reproduced or copied without written permission.
MFG. ENG.						
Q.C.		MACHINE FINISH	± 1°			
SALES		ANGLES CONCENTRICITY SQUARENESS	.005 TIR .001 PER IN.			
DO NOT SCALE DRAWING		REMOVE ALL BURRS BREAK SHARP CORNERS		TITLE PARALLEL SHAFT GEARMOTOR		
MATERIAL SPEC.		Req. per Piece	RECEIVED AS	DWG. BY	DATE	SCALE 1:3
		Pattern No.		CRD. BY	DATE	