
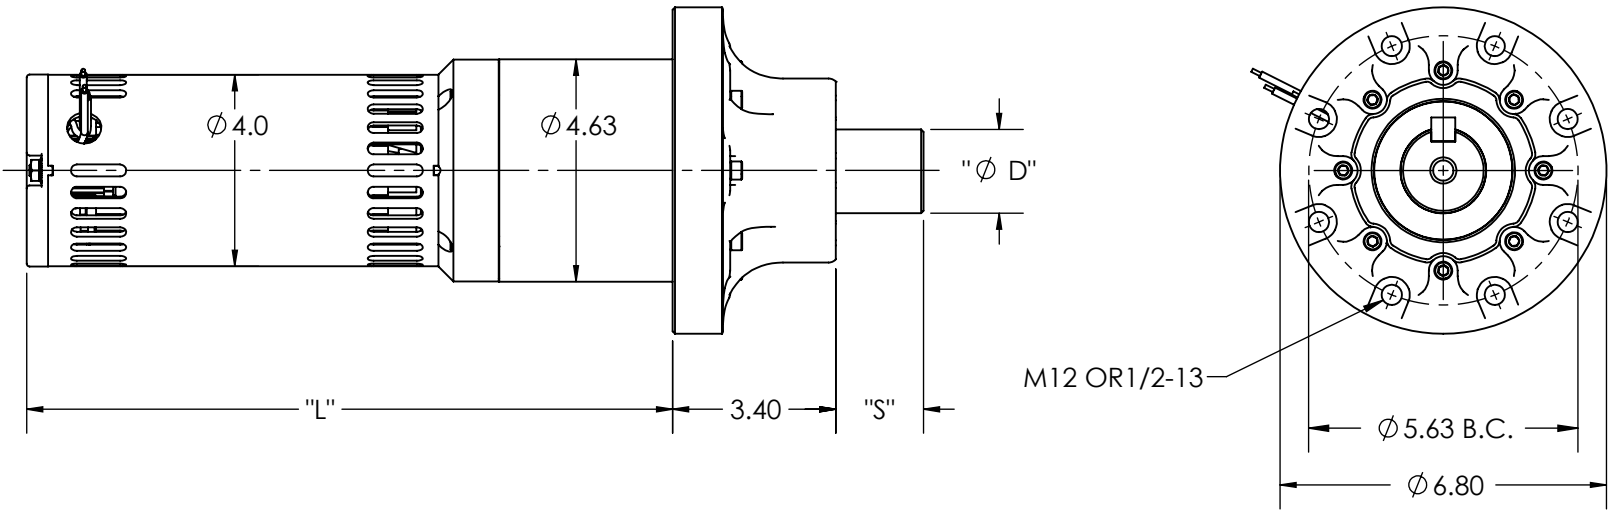


OPTIONAL FEATURES	
INPUT VOLTS	12 VDC / 230 VDC
OUTPUT SPEED	3 RPM / 1000 RPM
OUTPUT TORQUE	UP TO 1000 FT-LB
GEAR RATIO	7:1 - 1350:1
LENGTH "L"	5.60 / 8.75
SHAFT DIA. "Ø D"	UP TO Ø 2.00
SHAFT EXT. "S"	AS REQUESTED
SHAFT FEATURE	HOB, KEYWAY, FLAT, OR AS REQUESTED
MOUNTING	FLANGE MOUNT, FOOT MOUNT
BRUSHES	INTERNAL; REPLACEABLE
LEAD WIRES	AS REQUESTED
BEARINGS	BALL OR TAPERED ROLLER
VENTING	ENCLOSED / VENTED / FAN COOLED
INSULATION	UL CLASS H
MOTOR TYPE	SERIES DM40

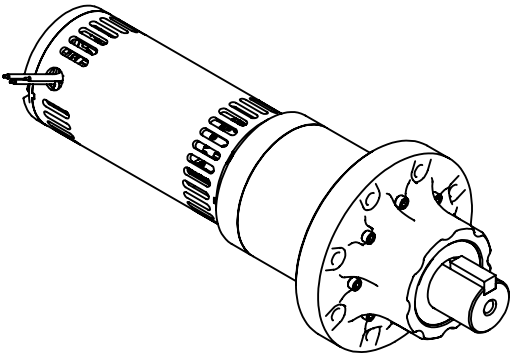

REV.		DESCRIPTION		DATE	ECN
DESIGN APPROVAL		UNSPECIFIED TOLERANCES		 PART NO. DPL1000 DUMORE CORPORATION 1030 VETERANS ST. MAUSTON, WI 53948	
DES. ENG.		.XXX	± .005		
MFG. ENG.		.XX	± .015		
		.X	± .050		
Q.C.		MACHINE FINISH	± 1°		
SALES		ANGLES	.005 TIR	This Drawing is the property of the Dumore Corporation. It must not be reproduced or copied without written permission.	
		CONCENTRICITY	.001 PER IN.		
		SQUARENESS			
DO NOT SCALE DRAWING		REMOVE ALL BURRS BREAK SHARP CORNERS		TITLE PLANETARY GEAR MOTOR	
MATERIAL SPEC.			RECEIVED AS	DWG. BY	DATE
				CRD. BY	DATE
					SCALE 1:4