
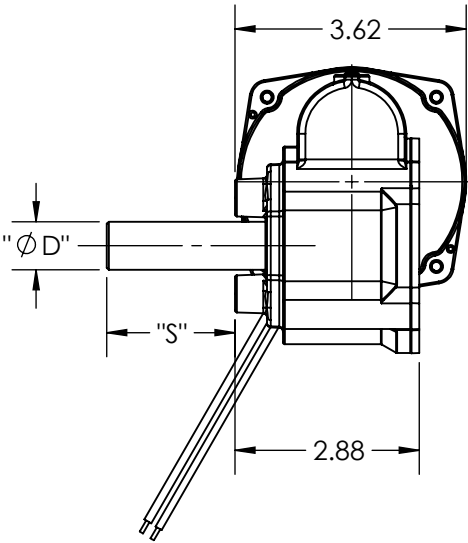
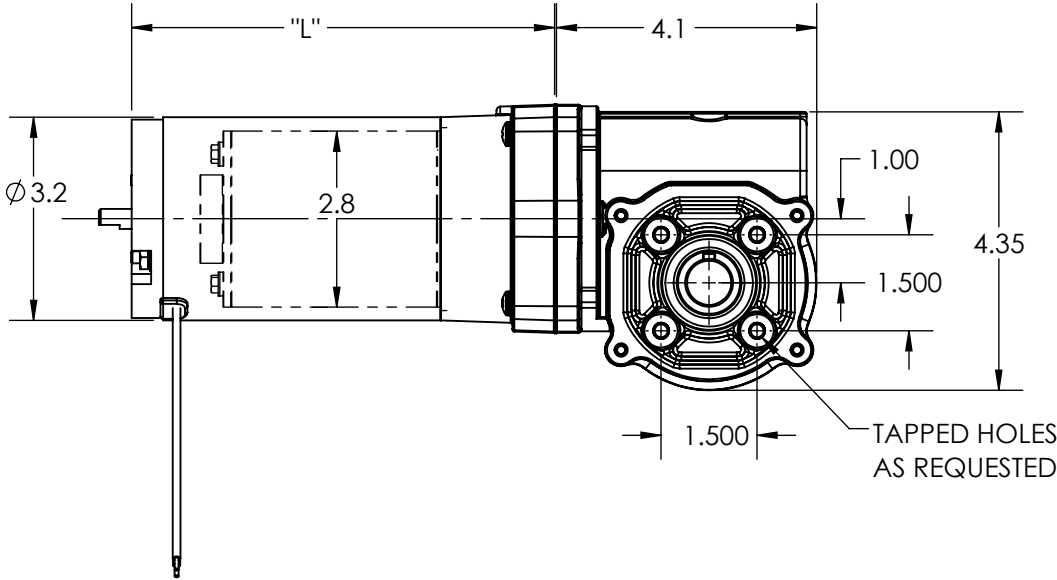


SPECIFICATIONS	
INPUT VOLTAGE	12VDC / 240 VDC
OUTPUT SPEED	1-250 RPM
OUTPUT TORQUE	UP TO 1200 IN-LBS. CONTINUOUS
GEAR RATIO	35:1 - 2900:1
LENGTH "L"	3.75 / 8.00
SHAFT DIA. "Ø D"	UP TO Ø 1.00
SHAFT EXT. "S"	AS REQUESTED
SHAFT FEATURE	HOB, FLAT, KEYWAY, OR AS REQUESTED
MOUNTING	FACE, FOOT MOUNT
BRUSHES	INTERNAL, OR EXTERNAL REPLACABLE
LEAD WIRES	AS REQUESTED
BEARINGS	BALL BEARING
VENTING	ENCLOSED / VENTED / FAN COOLED
INSULATION	UL CLASS H
MOTOR TYPE	SERIES DM32, OR DM28

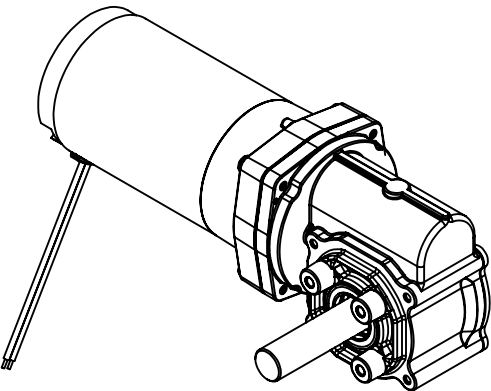

REV.		DESCRIPTION		DATE	ECN
DESIGN APPROVAL		UNSPECIFIED TOLERANCES		PART NO.	
DES. ENG.		.XXX	± .005	 DR600	
MFG. ENG.		.XX	± .015		
Q.C.		.X	± .050		
SALES		MACHINE FINISH	± 1°		
		ANGLES	.005 TIR	DUMORE CORPORATION 1030 VETERANS ST. MAUSTON, WI 53948	
		CONCENTRICITY	.001 PER IN.		
		SQUARENESS			
DO NOT SCALE DRAWING		REMOVE ALL BURRS BREAK SHARP CORNERS		TITLE	
MATERIAL SPEC.				RIGHT ANGLE GEAR MOTOR	
		Reqs. per Piece		RECEIVED AS	
		Pattern No.		DWG. BY	
				CRD. BY	
				DATE	
				SCALE	
				1:2	